

CODE NUMBER

33153068

DESCRIPTION

IoT - SC Argus™ Pro, 4" Trim Plate, Box Transformer Power Supply, Below Deck Thermostatic Mixing Valve, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, SC Argus™ Pro Compatible, Optima® Hardwired-Powered Deck-Mounted Mid Body IoT Faucet.

DETAILS

- Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared
- Mounting Type: Single Hole
- Mounting Size: Single Hole 1-1/4" to 1-1/2"
- Trim Plate: 4" (102mm) (4)
- Power Supply: Box Transformer (BOX)
- Temperature Mixer: Below Deck Thermostatic Mixing Valve (BDT)
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 30 seconds
- Factory Default Gallons per Cycle: 0.25
- IoT: SC Argus™ Pro Compatible

FEATURES

- Commercial Grade Faucet
- ADA Compliant
- Cast Brass Spout
- Quick Connect Fittings
- Integrated Water Shut-off
- On-demand or Metered activation
- Hygienic Line Flush
- Self-adapting Sensor

IOT Smart Capabilities

- Compatible with Sloan's SC Argus Pro smart restroom system
- Automatically sends faucet data to SC Argus Pro system
- Provides detailed product information, image, model, total activations, total operating hours, location room
- Remote setting adjustments via SC Argus Pro
- Remote hygienic line flush settings and changes
- Remote access to Water usage, daily activations, operating status and battery strength reporting
- Notes area to track maintenance details and location
- Requires subscription to SC Argus Pro SaaS

ELECTRICAL SPECIFICATIONS

- Sensor Range: 4"-5" (102-127mm)
- Timeout Adjustment Settings: 30s


POWER SUPPLY OPTIONS

- 24VAC Box Transformer (included with BOX models), 0345370PK


VIDEOS



Variation not shown: 4" Trim Plate

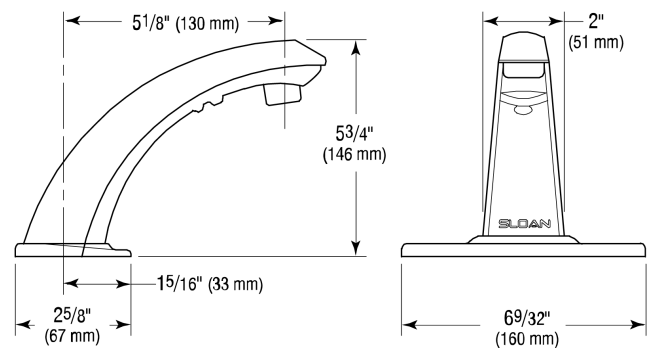

COMPLIANCES & CERTIFICATIONS

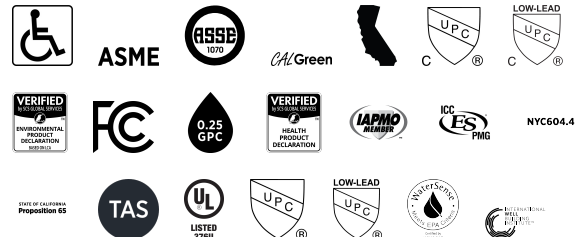

(ADA Compliant, ASME A112.18.1 Compliant, ASSE 1070, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, FCC Certified, GPC 0.25 or less, HPD, IAPMO, NSF-61, NYC604.4, Proposition 65, TAS, UL Certified, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

RECOMMENDED SPECIFICATION

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via SC Argus Pro software-as-a-service



NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-880 SMT product? [View](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

-  [Sloan Optima Below Deck Faucet](#)
-  [SC Argus™ Pro](#)

DOWNLOADS

- [Optima Smart Faucet Below Deck Installation Instructions](#)
- [Trim Plate Guide](#)
- [Faucet Spray Heads Repair and Maintenance Guide](#)
- [ETF-80/880 and EBF-85/187 Below Deck Repair and Maintenance Guide](#)
- [Additional Downloads](#)

[the general spec sheet with all options.](#)

[Find a matching soap dispenser](#) for this faucet.

[Find a compatible sink](#) for this faucet.

WARRANTY


[View Warranty Information](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131


Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

ROUGH-IN

**ETF-880 Faucet with Bak-Chek® Tee
for Hot and Cold Water Supply
(shown with 4" trim plate)**

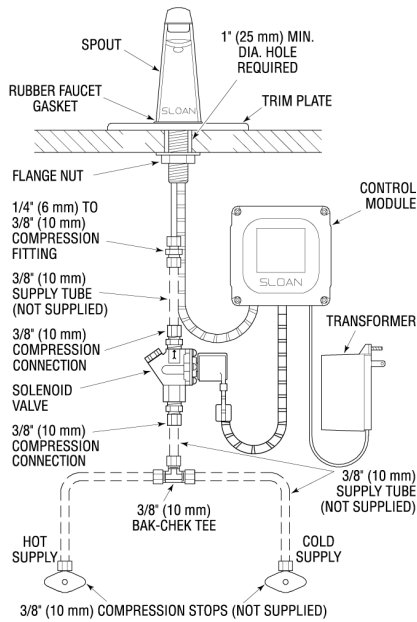

**ETF-880 Faucet with ADM Variation Mixing
Valve for Hot and Cold Water Supply
(shown with 8" trim plate)**

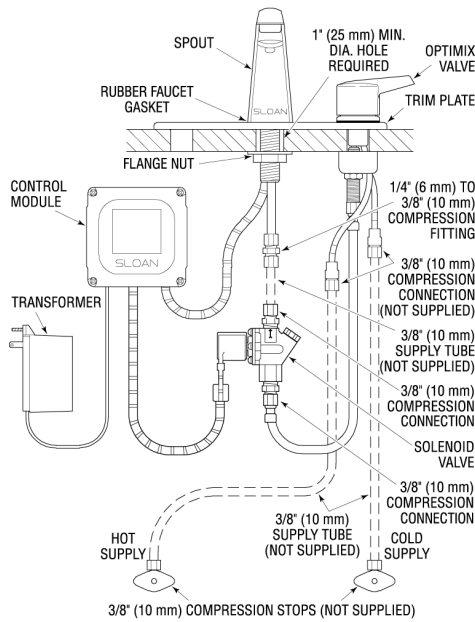

**ETF-880 Faucet with BDM and BDT Variation Mixing
Valves for Hot and Cold Water Supply
(shown with 4" trim plate)**

